


## Armeringskobling, (hun)

Type 4010, elgalvaniseret

FeB500 iht. NEN 6008, ON

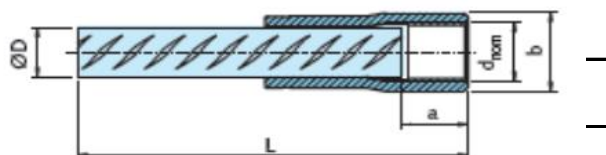

EDB-Nr.		005012400	005012600	005012800	005012999	005016550	005016800
D (B500B):	mm	Ø 12	Ø 12	Ø 12	Ø 12	Ø 16	Ø 16
Gevind dnom:	metrisk	M 16	M 16	M 16	M 16	M 20	M 20
L:	mm	415	615	840	1040	560	810
a:	mm	25	25	25	25	33	33
b:	mm	21	21	21	21	26	26
l:	mm	58	58	58	58	71	71
Nom. Spændingsareal	mm <sup>2</sup>	113	113	113	113	201	201
Stålbrud i træk: (Nrd,s)	kN	48	48	48	48	86	86
EDB-Nr.		005016102	005016144	005020700	005020999	005020128	005020180
D (B500B):	mm	Ø 16	Ø 16	Ø 20	Ø 20	Ø 20	Ø 20
Gevind dnom:	metrisk	M 20	M 20	M 24	M 24	M 24	M 24
L:	mm	1060	1480	705	1005	1320	1840
a:	mm	33	33	38	38	38	38
b:	mm	26	26	32	32	32	32
l:	mm	71	71	90	90	90	90
Nom. Spændingsareal	mm <sup>2</sup>	201	201	314	314	314	314
Stålbrud i træk: (Nrd,s)	kN	86	86	136	136	136	136
EDB-Nr.		005025999	005025150	005025226	005032140		
D (B500B):	mm	Ø 25	Ø 25	Ø 25	Ø 32		
Gevind dnom:	metrisk	M 30	M 30	M 30	M 42		
L:	mm	1055	1555	2315	1490		
a:	mm	48	48	48	65		
b:	mm	40	40	40	54		
l:	mm	114	114	114	140		
Nom. Spændingsareal	mm <sup>2</sup>	491	491	491	804		
Stålbrud i træk: (Nrd,s)	kN	213	213	213	348		

Der tages forbehold for trykfejl og evt. ændringer.